



OPTIC POSITION (Front View)

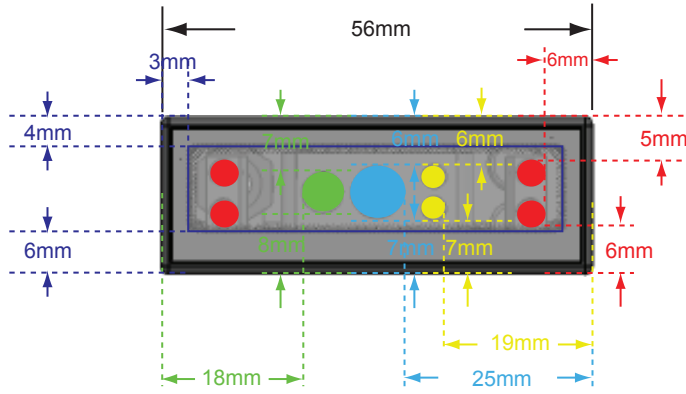

- Infrared (Auto-sensing) Sensor
- Illumination LED
- Image Sensor
- Laser Aimer
- Illumination Clear Aperture
(This area must not be blocked to ensure proper performance)

SCANNING RANGE

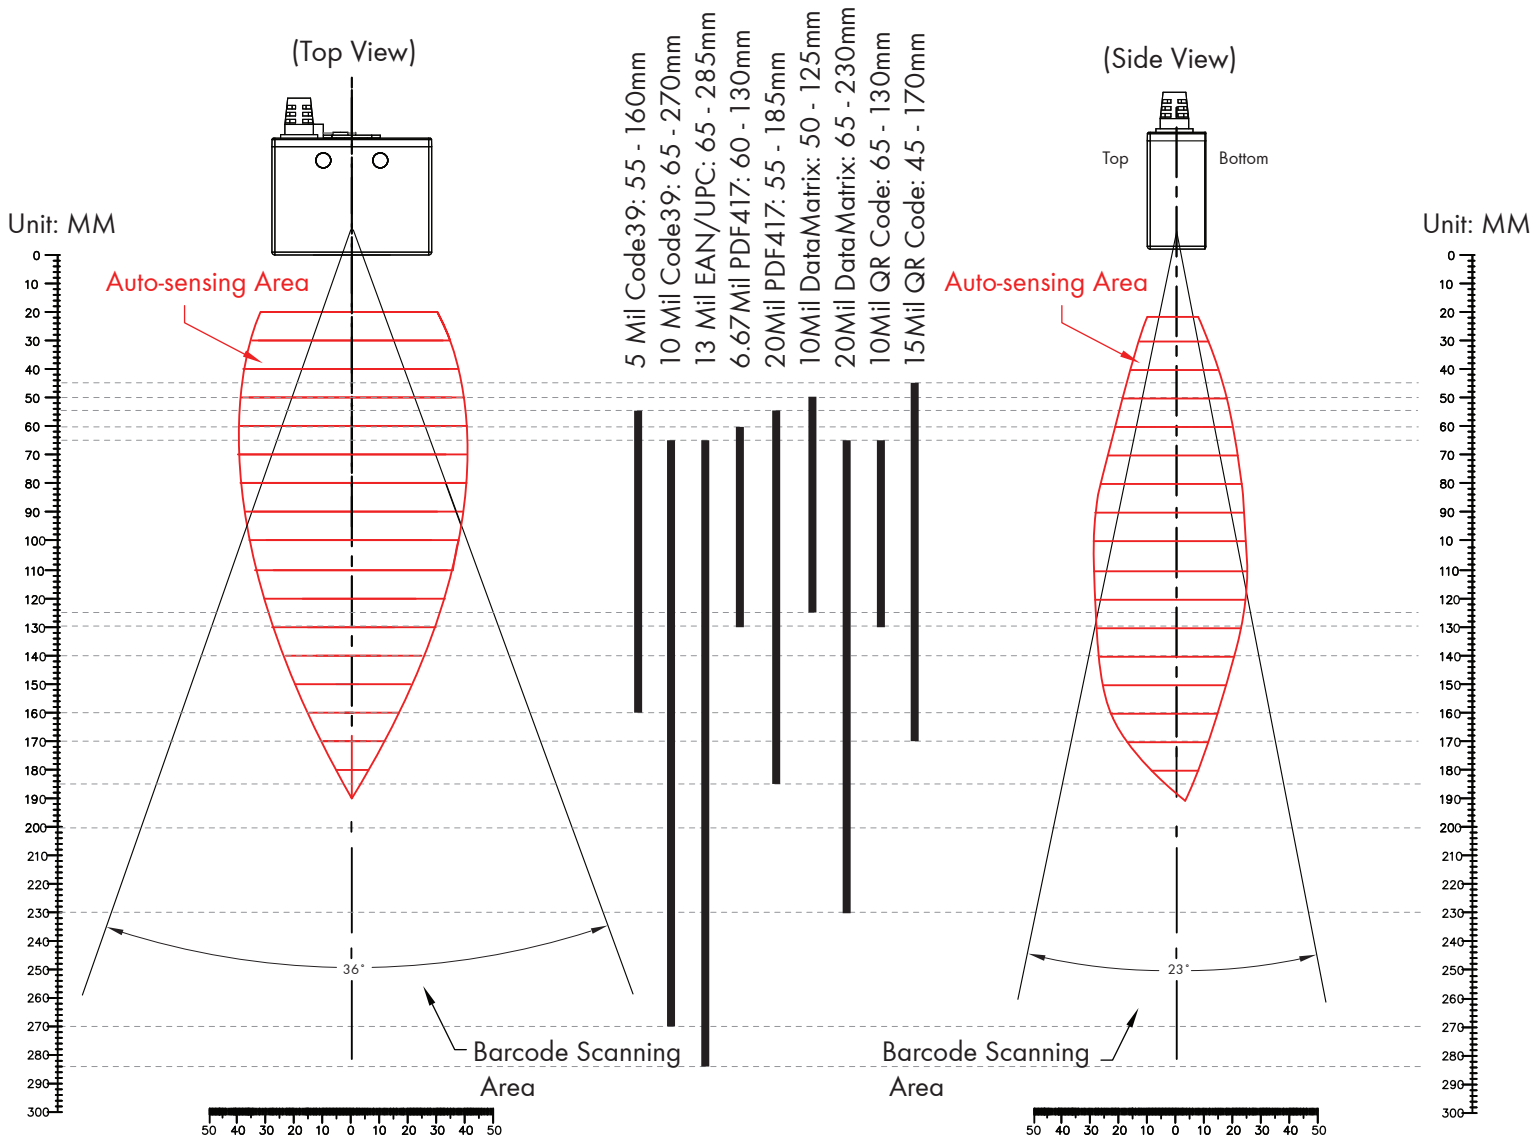

Depth of Field (cm)	Width of Field (cm)	Minimum 1D Resolution	Minimum 2D Resolution
5	3	5 Mil Code39	6.67 Mil PDF417
10	5	5 Mil Code39	6.67 Mil PDF417
			10 Mil DataMatrix 10 Mil QR Code
15	7.5	5 Mil Code39	10 Mil PDF417
			20 Mil DataMatrix 15 Mil QR Code
20	9.5	10 Mil Code39	20 Mil DataMatrix
25	11.5	10 Mil Code39	N/A